

 **LIUGONG**

# 856H-E <sup>MAX+</sup>

<b>BATTERY TYPE</b>	LFP
<b>RATED STORAGE ENERGY</b>	350 kWh
<b>OPERATING WEIGHT</b>	19,971 kg
<b>RATED LOAD CAPACITY</b>	5,800 kg
<b>STANDARD BUCKET SIZE</b>	3.5 m <sup>3</sup>
<b>STANDARD BREAKOUT FORCE</b>	162 kN
<b>STANDARD DUMP CLEARANCE</b>	2,977 mm



B A T T E R Y   E L E C T R I C   V E H I C L E

TOUGH WORLD. TOUGH EQUIPMENT

# 856H-E <sup>MAX+</sup> SPECIFICATIONS >>>

## POWER BATTERY

Battery Type	LFP
Rated Storage Energy	350 kWh
Nominal Voltage	580 V
System Voltage	DC24V
BMS Protection Level	IP67
Cooling Type	Intelligent temperature control, liquid cooling
Recommended Charger	240 kW
Charging Time	≤ 75 min

## DRIVE MOTOR

Peak Power	160 kW
Protection Level	IP67
Ambient Temperature	- 40 ~ 85 C
Cooling Type	Intelligent temperature control, liquid cooling
Altitude	≤ 5000 m

## HYDRAULIC MOTOR

Peak Power	160 kW
Protection Level	IP67
Ambient Temperature	- 40 ~85 C
Cooling Type	Intelligent temperature control, liquid cooling
Altitude	≤ 5000 m

## TRANSMISSION

Manufacturer	LiuGong
Number of Speeds, fwd / rev	2 / 1
Transmission Type	Planetary, power shift

## AXLES

Type	LiuGong dry axle
Axle Oscillation	± 9.0°
Tire Size	23.5-25 PR20

## WORKING HYDRAULICS

System	Fixed & variable dual pump confluent
Operation	Fingertip control
Work Pump	Gear pump
Work Pressure	25 MPa

## STEERING HYDRAULICS

System	Flow amplifier
Steering Pump	Piston variable pump
Steering Relief Pressure	21 MPa

## BRAKES

Service Brake Type	Full hydraulic
Service Brake Actuation	Hydraulic dry brake
Parking Brake Type	Drum
Parking Brake Actuation	Electro hydraulic control

## LOADER ARM PERFORMANCE



Operating Weight	19,971 kg
Bucket Capacity	3.5 m <sup>3</sup>
Tipping Load - Straight	16,400 kg
Tipping Load - Full Turn	14,480 kg
Raise Time	5.2 s
Dump Time	1.5 s
Float Down Time	2.3 s
Fastest Total Cycle Time	9 s
Bucket Breakout Force	162 kN
A Maximum Hinge Pin Height	4,156 mm
B Dump Clearance at Full Height Discharge	2,977 mm
C Dump Reach at Full Height Discharge	1,231 mm
D Maximum Digging Depth, Bucket Level	50.2 mm
S <sub>1</sub> Bucket Rollback at Ground Level	44.3°
S <sub>2</sub> Bucket Rollback at Carry	49°
S <sub>3</sub> Bucket Rollback at Maximum Height	56°
S <sub>4</sub> Maximum Dump Angle at Full Height	45°

## DIMENSIONS

E Ground Clearance	431 mm
G Wheelbase	3,525 mm
H Cab Height	3,500 mm
J Wheel Tread	2,280 mm
K Width Over Tires	2,880 mm
L Length with Bucket Down	8,615 mm
M Turn Angle, Either Side	38°
P Rear Angle of Departure	28°
R <sub>2</sub> Turning Radius, Bucket Carry	7,209 mm
R <sub>2</sub> Turning Radius, Outside of Tire	6,625 mm
W Width Over Bucket	2,976 mm

## SERVICE CAPACITIES

Anti-freeze	45 L
Hydraulic Reservoir	230 L
Axle, Front / Rear	35 / 35 L
Transmission	30 L

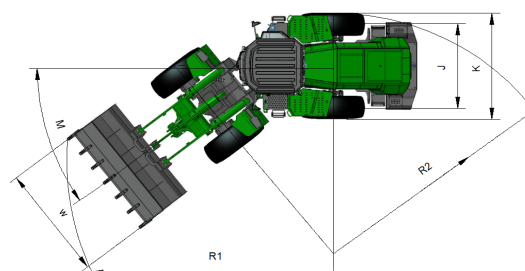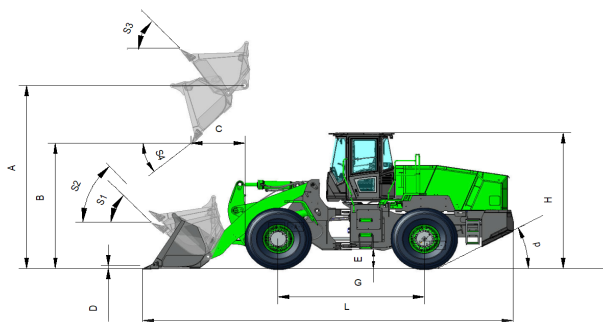

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
 T: +86 772 3886124 E: overseas@liugong.com  
 www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area.

08/2022 Designed by LiuGong